



NOTE:

THIS DRAWING IS PROVIDING FOR REFERENCE ONLY AND SHOULD NOT BE USED FOR PLANNING INSTALLATION OTC RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.


OVERSEAS TRADING CENTRE

P.O.BOX 8266 SHARJAH (A4-075)
SAIF ZONE U.A.E
Tel: +971 6 5575888
Fax: +971 6 5575999

Website: www.otcglobal.net
Website: www.otcpower.net



4" solar DC water pump
Oil filled motor

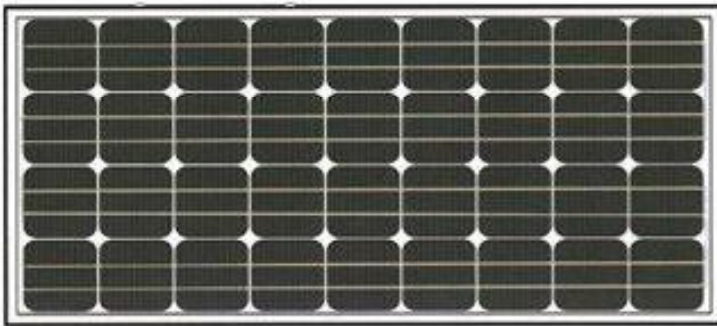

Stainless steel

Screw

Cable Connector

Water level sensor

Cable for solar panel

PUMP PERFORMANCE

TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m ³ /h)	MAX HEAD (m)	OUTLET (in)	DIAMETER (mm)
JS4-3.0-60	36	450	3.0	60	1"	100
JS4-2.5-70	48	500	2.5	70	1"	100
JS4-3.6-80	48	750	3.6	80	1"	100
JS4-4.0-100	72	1000	4.0	100	1"	100
JS4-4.2-120	72	1000	3.2	120	1"	100
JS4-2.5-140	72	1000	2.5	140	1"	100